It's good to live on wood


ENG | 2023



Contents

- It's good to live on wood
- Why Parky
- Collection
- Inspiration
- Installation and maintenance
- Overview

It's good to live on wood





Our goal is to make wood floors that inspire. For over 40 years we have innovated our production processes to achieve a rock solid finish, suitable for intensive and even commercial use. Everything is made in Belgium, at the heart of Europe, with the help and knowledge of an amazing team. 900 employees around the globe are fully committed to create the floor for your home or project. We are going the extra mile to create fabulous looks, next-level durability and sharp prices with woods full of character. This in order for you to achieve the interior look and feel of your dreams.





As sustainable grown wood is getting scarce, we are extremely mindful using it. By using veneers, thinly sliced layers of real wood, we maximize the use of the harvested wood species grown over decades. Reinforcing the thin layers of wood with an HDF carrier, a high-density fibre board made of 100% recovered wood, we create all natural floors which are stronger and way more durable than solid parquet.

4 – 5



layers of lacquer, making the natural floor 2x more scratch-resistant and ready for intensive use.

Our Titanium finish has eight robust



Why Parky



Real wood

Feel real wood. Each Parky floor is finished with a **top layer** of authentic wood species, in oak or walnut. Just like a solid wood floor, no two boards are the same. A beautiful natural look, combined with the warmth of wood.

A sustainable choice

Wood is precious. Therefore we use it sparingly: we only use a thin layer of wood for the top layer. This way we use 25 times less wood than required for the production of solid parquet. Every tree we use comes from sustainably managed forests. We also get 100% of our energy from renewable sources such as solar and wind power. Finally, the sawdust and wood waste from our production facility is used to heat the floor space during winter. For us, the future is a CO, neutral world.



Waterproof surface

The Parky board has **a waterproof surface** that holds back water for at least 12 hours. Both the planks and the grooves are protected, thanks to Aqua Sealing Complete technology. This makes your floor bulletproof for daily spills and drops.









High-strength and scratch resistant

Parky floors are ultra strong. On one hand, the wooden top layer is pressed onto a **high density fibre board** (HDF), that makes your floor stronger and more dimensionally stable than any traditional solid or engineered wooden floor.

On the other hand, the wooden top layer is finished with our **Titanium finish**, that consists of eight robust layers of lacquer. This makes your floor 2x more scratch-resistant than a traditional lacquer finish and ready for intensive and even commercial use. Use Parky with peace of mind in your kitchen or in larger projects with high traffic areas, such as hotel lobbies, offices, retail stores...



The secret lies in the wellthought-out structure

Titanium: the ultra-strong, invisible, 8-layer varnish

There is a reason why we call it **Titanium**. Due to the eight layers of bulletproof lacquer, your floor is **2x more resistant to daily wear and** tear and scratches. Also, the wood pores are protected from moisture and dirt. And yet, thanks to the super matt and brushed finish, the natural feel and timeless elegance of wood are preserved. Not to mention, the Titanium finish requires no post-treatment and makes re-sanding completely unnecessary!





Wood backing for dimensional stability.

With Deluxe+ a 2 mm layer of cork provides a comfortable sound absorption.

Sturdy HDF board

The thinner the wooden top layer, the more resistant the floor is to impacts. This is because the HDF, a highdensity fibre board made of 100% recovered wood, is even stronger than natural wood.

Thus, we ensure that the floor is 3x more resistant to heavy objects or stiletto heels than solid parquet.




Wear layer 0.6 mm oak Wear layer 2 mm oak



Discover even more advantages

Perfect match with your radiant heating

Different kinds of radiant heating systems can be used with Parky. All technical details can be found in the technical table at the back and on our website.



Real Wood

On the HDF board we press a **wood wear** layer according to the DSI technology (Double Sided Impregnation). During this process the adhesive gets pressed into the wood. While lacquering the top layer, the wood absorbs the varnish and makes a fusion with the adhesive. This makes the top layer of wood ironclad.





Completely hygienic

The V grooves are not a hotbed for dust and dirt. Each groove is coloured and sealed with the **Aqua Sealing** Complete system. This protects your wood against moisture for 12 hours and makes maintenance a piece of cake. A hygienic floor is guaranteed.



Easy to install

Parky, it's as **easy to install as** laminate and LVT. Count on the handy Uniclic[®] and Unifit X[®] fold-down system for a problem free result. The warmth and feel good of wood is just a click away.





ò

Floor for healthier indoor air quality.

The Parky floor is only finished with water based stains, adhesives with a minimum of volatile organic compounds and stains with a minimum of solvents. It is scientifically proven: indoor air quality improves with a Parky floor. All floors have a **A+ quality label**.



Experience your best moments on a real wooden floor. Imitations such as vinyl or laminate can never match the warmth and uniqueness of real wood. You don't just see it, you feel it...

A line in the second

12 – 13



Endless variations with pure nature

- Your species

Wide range of wood species and colours.

- Your patterns

From straight boards to a herringbone pattern.

- Your sizes

Boards in different lengths, widths and thicknesses, with or without a 2 mm cork underlayer.

Oaks





Essence Oak



lvory Oak

Milk Oak



Valley Oak

Antique Oak

Walnuts

Desert Oak



Frozen Walnut

Smoked Walnut


Do you prefer authentic oak planks, or would you prefer a walnut parquet with a pronounced structure? From milky white to rich chocolate brown, we are happy to help you choose the right colour.







Silk Oak



Mountain Oak

16 – 17

More information regarding the possible combinations of colour, style or size can be found on page 48

The uniqueness of oak

If you choose oak, you have two options. The Premium grading gives you the emphasis of a pure and clean look; the Rustic Light variant has a more pronounced character thanks to the knots. It's up to you to choose the look and feel you want.

PREMIUM

RUSTIC LIGHT

We only use the purest veneer wood for our Premium boards. Exceptionally pure quality from the very best of nature. This rustic wooden floor seeks the balance between smaller and larger knots for a more pronounced style.



More information regarding the

More information regarding the possible combinations of colour, style or size can be found on page 48





The pattern that suits you

Parky offers you endless combinations. Whatever pattern you choose, it remains timeless, from ultra-sleek villas to stately mansions and everything in between. Different lengths and widths offer a wide range of choices: from a classically laid board floor to a herringbone pattern. Even a double herringbone pattern is possible.



Herringbone







Calculate how many boards you need with our handy Pattern Calculator at patterns.par-ky.com



Deluxe+ Ivory Oak Prem

PARKY COLLECTION

Available as pattern floor



European Oak Premium



Ivory Oak Premium or Rustic Light



Smoked Walnut




The size of the room determines the size of your boards. For smaller rooms, opt for narrow, short boards. For larger spaces, wider and longer boards are the way to go. The direction also affects the end result. If you lay out your boards lengthwise, your room looks bigger.

We'll give you **five possible sizes** to work with. Don't worry if you find it difficult to choose, feel free to ask your distributor for advice.

Board floors		
	_	
	Pro	
		1203 × 190 × 7,2 mm
	Master	
		1506 × 166 × 10 mm
	Deluxe+	
		1810 × 166 × 12 mm
	Summit	
		2050 × 233 × 10 mm
Pattern floor		

Swing

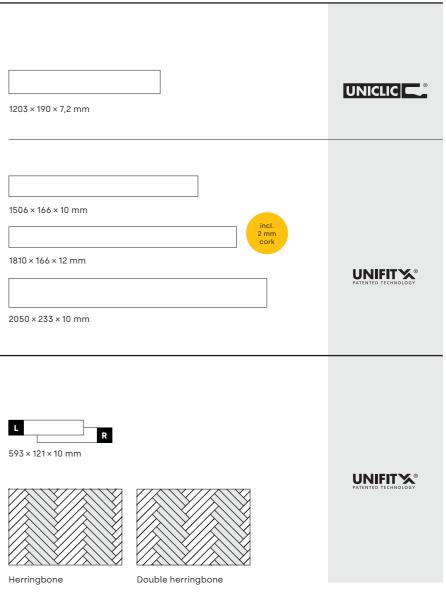

Which colour and style can be combined can be found in the overview on page 48



Calculate how many boards you need with our handy Pattern Calculator at patterns.par-ky.com

diam'r.

Two click systems

All our floors are equipped with the handy **Uniclic**[®] or **Unifit X**[®] fold-down system, which makes installation as easy as it can be. With the Unifit X® fold-down option, you can even save 30% on installation time. All the advantages of a click laminate, but with the difference that you feel the warmth of real wood under your feet.



Floors made to live on

Each wood specie has its own character that can match your personality or taste. You choose from a wide range of colours, patterns and sizes until you find the wooden floor that fits perfectly into your interior. Sleek and subtle, rustic for a pronounced touch or the warm character of our Walnut collection - you decide.



Smoked Walnut

24 – 25



Ivory Oak Rustic Light

Wood is a natural product.

The differences in colour and structure are part of it. This makes it **beautiful and unique**. There are different grading options, each of which gives the floor a certain appearance. Are you looking for a **sleek, modern interior**? Then choose a **Premium** quality. Do you prefer a **country style**? Then go for **Rustic Light.**







Milk Oak Premium



Valley Oak Premium

Commercially rated floors

Parky floors are made to live up to their full potential. This also makes them suitable for places where there is a lot of traffic, such as an office or retail. Lots of traffic isn't a problem: thanks to a high-quality finish in class 33, our floors are made for intensive use.









Smoked Walnut

You can combine certain colours

with SHINNOKI® panels and ASTRATA® slats and coustics, providing a consistent wood solution for your project. Learn more at decospan.com

Ivory Oak Premium

Live life to the fullest and enjoy every piece of floor. The colour, the structure, the warmth of real wood.





Essence Oak Rustic Light

Long, wide boards are ideal for larger spaces

The size of the space determines the size of the boards. For smaller spaces, it is best to choose narrow, short boards. In large spaces, broad, long boards come more into their own.

The orientation of the boards also has an effect. Long boards installed along the length of a room make the room look even longer.





perfection

We finish each board with a **Titanium finish**: eight layers of high-strength lacquer that makes your floor rock-solid. On top, the Aqua Sealing Complete technology makes the surface waterproof, protects the pores from dust and moisture and makes maintenance a piece of cake.

a very natural look.



The finish that gives your wooden floor a touch of


Our **brushed** finish accentuates the natural structure of the wood and gives the grain a beautiful appearance. And finally, these brushed floors have a matt finish, giving them







Umber Oak Premium

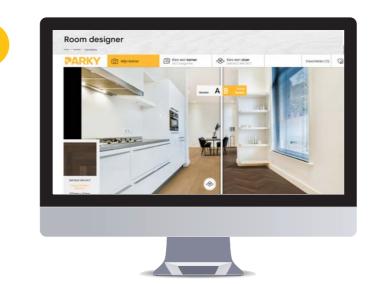

View and compare all Parky floors in your own room. Discover our brand new "Room Designer" on the site and via this QR code.



PARKY INSPIRATION

40 - 41





Antique Oak Premium

These handy tools make it as easy as it can be to install



You will find the installation instructions on each package, on the site and via this QR code.

Installation kit

Installing Parky is easy. With our installation kit you have all the necessary tools to install your floor quickly and without damage: spacers to respect the expansion joint, a pull bar and a tapping block.

Choose the right underlay

Damp foil (150 micron, 25m²/pack)

- This damp foil serves as a vapour barrier and can only be used on Parky floors with an integrated cork layer (Deluxe+ 06). Use our waterproof tape for perfect moisture protection.
- Suitable for radiant heating.

Basic underlay (2 mm thick, 20m²/roll)

- This affordable and high-quality underlay guarantees a comfortable sound absorption.
- Smooths out slight irregularities in the subfloor.
- Has an integrated moisture barrier. Use our waterproof tape for perfect moisture protection.
- Suitable for radiant heating.

Silent underlay (2 mm thick, 20m²/roll)

- This premium underlay guarantees a maximum sound absorption and offers a contact sound insulation improvement of at least 20 dB.
- Smooths out slight irregularities in the subfloor.
- Has an integrated moisture barrier. Use our waterproof tape for perfect moisture protection.
- Suitable for radiant heating.

Waterproof tape



Protecting your floor against rising moisture is a must. We recommend you use Parky's tested waterproof tape to glue your underlay together. It's the only way to protect the backside of the floor.











This is how you finish your floor to the last detail

Skirtings

Wooden skirtings

The crowning glory: a matching wooden moulding.

Dimensions: 2150 × 80 × 12 mm 84.6 × 3.2 × 15/32 inch



Paintable skirtings

Choose white paint baseboards if you want a clean, modern look. You can easily paint the baseboards in the same colour as the wall.

Dimensions: 2150 × 69 × 12 mm 84.6 × 2.7 × 1/2 inch





Profiles

Wooden profile (residential applications)

This handy 3-in-1 profile is available in all Parky colours.

Particularly useful as

- End profile (jointless horizontal finish)
- Reducer profile (to bridge the gap with a lower floor)
- T-profile (expansion profile)

Dimensions:

2150 × 48 × 13 mm 84-5/8 × 1 7/8 × 33/64 inch



We developed aluminium profiles that are stronger than the wooden variant. Ideal for intensive use.

Dimensions:

- Connecting profile 900 × 38 mm 35.4 × 1.5 inch
- End profile 2700 × 30 mm 106.3 × 1.9 inch



1. End profile 2. Reducer profile 3. T-profile



Connecting profile End profile

How to keep your floor in a fabulous shape

You can count on the Parky cleaner to clean your floor without damaging the varnish. It was specially developed to remove dirt and protect your wood.



Wood Floor Cleaner

1000 ml Dilute the cleaner with water. Clean your floor with a slightly damp cloth.



Repair Pens

Repair small scratches in a jiffy. The box contains 1 colour pen and 1 lacquer pen. This way you can make the scratch invisible and give it again the necessary protection.

Severe damage? Not a disaster

Thanks to the clic system, you can easily replace a board in your floor. Consult your distributor or replace your board yourself.


The complete manual of our maintenance products and tutorials for replacing a board can be found at www.par-ky.com



Repair Wax

Using the Repair Wax you can repair dents that come through the paint. The wax repairs the damage and protects your floor against penetrating moisture. The Repair Wax kit contains seven wax blocks, a melting knife and a spatula.



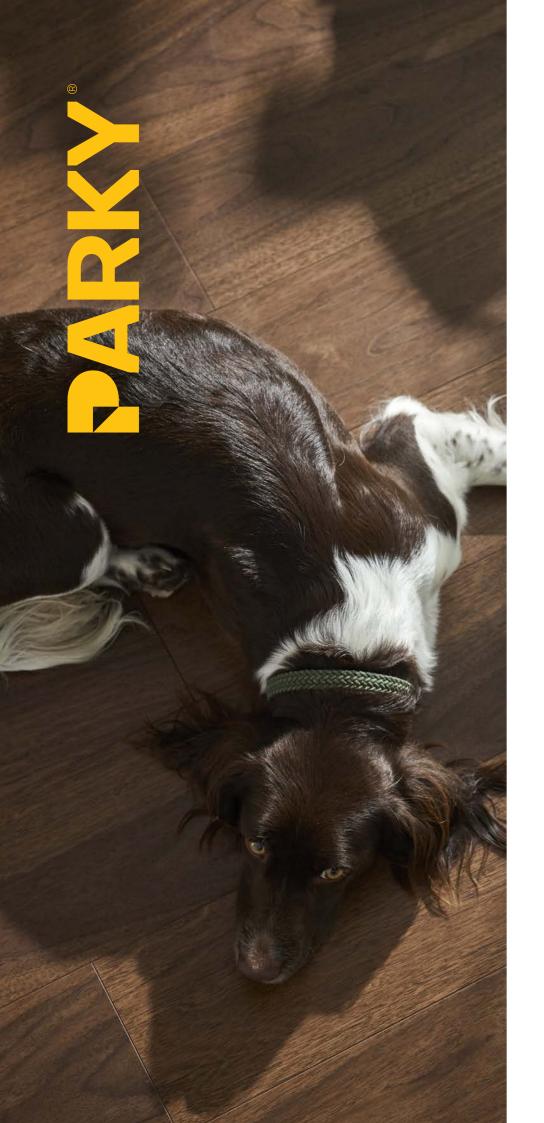

		BOARD FLOOR			PATTERN FLOOR	
			incl. 2 mm cork			
		Pro	Deluxe+	Master	Summit	Swing
	Usage classification*					
ard	Dimensions	1203 × 190 mm 47-3/8 × 7-1/2 inch	1810 × 166 mm 71-1/4 × 6-1/2 inch	1506 × 166 mm 59-5/16 × 6-1/2 inch	2050 × 233 mm 80-3/4 × 9-1/8 inch	593 × 121 mm 23-3/8 × 4-3/4 inch
	Thickness	7.2 mm 9/32 inch	12 mm 1/2 inch	10 mm 3/8 inch	10 mm 3/8 inch	10 mm 3/8 inch
	Wearlayer	0.6 mm	0.6 mm	0,6 mm	0,6 mm	0,6 mm
	Click system		UNIFITX	UNIFIT	UNIFIT	UNIFIT
	Boards		PATENTED TECHNOLOGY	PATENTED TECHNOLOGY	PATENTED TECHNOLOGY	PATENTED TECHNOLOGY
	Surface area	2.514 m²	2.103 m ²	2.000 m ²	2.388 m²	0.789 m²
	Weight	27.06 sq.ft 16,30 kg	22.64 sq.ft 17.70 kg	21.53 sq.ft 17,3 kg	25.7 sq.ft 19,20 kg	8.49 sq.ft 6,9 kg
sh	Maxi +/- 1,5 mm	ю, зо ку -	17.70 kg 2	-	19,20 kg 2	- 0,9 Kg
	Bevel Mini +/- 0,5 mm	4	2	4	2	4
	Gloss	Super matt (3%)	Super matt (3%)	Super matt (3%)	Super matt (3%)	Super matt (3%)
	Gloss Structure	Super matt (3%) Brushed		Super matt (3%) Brushed		Super matt (3%) Brushed
		·····	Super matt (3%)		Super matt (3%)	
	Structure	Brushed	Super matt (3%) Brushed		Super matt (3%)	Brushed
opean Oak	Structure Premium	Brushed PRB101	Super matt (3%) Brushed		Super matt (3%)	Brushed
opean Oak ry Oak	Structure Premium Rustic Light Premium Rustic Light	Brushed PRB101 PRB135 PRB102 PRB110	Super matt (3%) Brushed DEXB+101		Super matt (3%)	Brushed SWXB101
opean Oak ry Oak	Structure Premium Rustic Light Premium Rustic Light Premium Rustic Light Premium	Brushed PRB101 PRB135 PRB102 PRB110 PRB103	Super matt (3%) Brushed DEXB+101 DEXB+102		Super matt (3%)	Brushed SWXB101 SWXB102
opean Oak ry Oak k Oak	Structure Premium Rustic Light Premium Rustic Light Premium Rustic Light Premium Rustic Light	Brushed PRB101 PRB135 PRB102 PRB100 PRB103 PRB137	Super matt (3%) Brushed DEXB+101 DEXB+102 DEXB+110		Super matt (3%)	Brushed SWXB101 SWXB102
opean Oak ry Oak k Oak	Structure Premium Rustic Light Premium	Brushed PRB101 PRB135 PRB102 PRB100 PRB103 PRB137 PRB104	Super matt (3%) Brushed DEXB+101 DEXB+102		Super matt (3%)	Brushed SWXB101 SWXB102
ry Oak K Oak Hert Oak	Structure Premium Rustic Light Premium Rustic Light Premium Rustic Light Premium Rustic Light	Brushed PRB101 PRB135 PRB102 PRB100 PRB103 PRB137	Super matt (3%) Brushed DEXB+101 DEXB+102 DEXB+110		Super matt (3%)	Brushed SWXB101 SWXB102
opean Oak ry Oak k Oak sert Oak ber Oak	Structure Premium Rustic Light	Brushed PRB101 PRB135 PRB102 PRB100 PRB103 PRB137 PRB104 PRB116	Super matt (3%) Brushed DEXB+101 DEXB+102 DEXB+110		Super matt (3%)	Brushed SWXB101 SWXB102
opean Oak ry Oak k Oak sert Oak ber Oak ique Oak	Structure Premium Rustic Light Premium	Brushed PRB101 PRB135 PRB102 PRB100 PRB103 PRB137 PRB137 PRB104 PRB116 PRB134	Super matt (3%) Brushed DEXB+101 DEXB+102 DEXB+110		Super matt (3%)	Brushed SWXB101 SWXB102
y Oak y Oak c Oak ert Oak ber Oak ique Oak untain Oak	Structure Premium Rustic Light Premium Premium Premium Premium Premium Premium Premium Premium	Brushed PRB101 PRB135 PRB102 PRB100 PRB103 PRB137 PRB137 PRB104 PRB116 PRB134 PRB106	Super matt (3%) Brushed DEXB+101 DEXB+102 DEXB+110		Super matt (3%)	Brushed SWXB101 SWXB102
opean Oak ry Oak k Oak sert Oak ber Oak tique Oak untain Oak	Structure Premium Rustic Light	Brushed PRB101 PRB135 PRB102 PRB100 PRB103 PRB137 PRB137 PRB104 PRB116 PRB134 PRB106	Super matt (3%) Brushed DEXB+101 DEXB+102 DEXB+110	Brushed	Super matt (3%) Brushed	Brushed SWXB101 SWXB102
ropean Oak rry Oak k Oak sert Oak tique Oak tique Oak sence Oak	Structure Premium Rustic Light Premium	Brushed PRB101 PRB135 PRB102 PRB100 PRB103 PRB137 PRB137 PRB104 PRB116 PRB134 PRB106	Super matt (3%) Brushed DEXB+101 DEXB+102 DEXB+110	Brushed	Super matt (3%) Brushed	Brushed SWXB101 SWXB102
CIKS ropean Oak ory Oak lk Oak sert Oak tique Oak tique Oak sence Oak k Oak	Structure Premium Rustic Light Premium Rustic Light Premium Rustic Light	Brushed PRB101 PRB135 PRB102 PRB100 PRB103 PRB137 PRB137 PRB104 PRB116 PRB134 PRB106	Super matt (3%) Brushed DEXB+101 DEXB+102 DEXB+110	Brushed	Super matt (3%) Brushed	Brushed SWXB101 SWXB102
opean Oak ry Oak k Oak sert Oak ber Oak tique Oak untain Oak ence Oak	Structure Premium Rustic Light Premium	Brushed PRB101 PRB135 PRB102 PRB100 PRB103 PRB137 PRB137 PRB104 PRB116 PRB134 PRB106	Super matt (3%) Brushed DEXB+101 DEXB+102 DEXB+110	Brushed	Super matt (3%) Brushed	Brushed SWXB101 SWXB102
ropean Oak rry Oak k Oak sert Oak tique Oak tique Oak sence Oak	Structure Premium Rustic Light	Brushed PRB101 PRB135 PRB102 PRB100 PRB103 PRB137 PRB137 PRB104 PRB116 PRB134 PRB106	Super matt (3%) Brushed DEXB+101 DEXB+102 DEXB+110	Brushed Brushed MAXB188 MAXB193	Super matt (3%) Brushed	Brushed SWXB101 SWXB102

Deluxe+	Master	Summit	Swing
Class 23	Class 23	Class 23	Class 23
Class 33	Class 33	Class 33	Class 33
Residential use:	Residential use:	Residential use:	Residential use:
limited lifetime warranty	limited lifetime warranty	limited lifetime warranty	limited lifetime warranty
Commercial use: 10 years			
EN14342:2013	EN14342:2013	EN14342:2013	EN14342:2013
19007	19003	19004	19010
6 % (+/-1)	6 % (+/-1)	6 % (+/-1)	6 % (+/-1)
1810 × 166 × 12 mm	1506 × 166 × 10 mm	2050 × 233 × 10 mm	593 × 121 × 10mm
0,6 mm	0,6 mm	0,6 mm	0,6 mm
≤0,5mm	≤0,5mm	≤0,5mm	≤0,5mm
≤0,2 mm	≤0,2 mm	≤0,2 mm	≤0,2 mm
≤0,2 %	≤0,2 %	≤0,2 %	≤0,2 %
3%	3%	3%	3%
> 1,3 N/mm²	> 1,3 N/mm²	> 1,3 N/mm²	> 1,3 N/mm²
≥ 1 N/mm²	≥ 1 N/mm²	≥1N/mm²	≥ 1 N/mm²
Unifit X®	Unifit X®	Unifit X®	Unifit X®
≤ 0,2 mm	≤ 0,2 mm	≤ 0,2 mm	≤ 0,2 mm
> 2000 N/lm	> 2000 N/lm	> 2000 N/lm	> 2000 N/lm
-			
850	850	850	850
10 kg	7 kg	7 kg	7 kg
< 10 %	< 10 %	< 10 %	< 10 %
≥ 40 N/mm²	≥ 40 N/mm²	≥ 40 N/mm²	≥ 40 N/mm²
> 6000 rev.	> 6000 rev.	> 6000 rev.	> 6000 rev.
≥ 1400 (EC3)	≥ 1400 (EC3)	≥ 1400 (EC3)	≥ 1400 (EC3)
class < 2	class < 2	class < 2	class < 2
grade 4*	grade 4*	grade 4*	grade 4*
super matt 3% (+/- 1)			
			· · · · · · · · · · · · · · · · · · ·
≥ 4 Newton	≥ 4 Newton	≥ 4 Newton	≥ 4 Newton
< 0,05 mm	< 0,05 mm	< 0,05 mm	< 0,05 mm
≥ 8 Newton	≥ 8 Newton	≥ 8 Newton	≥ 8 Newton
2 Hb	2 Hb	2 Hb	2 Hb
grade > 6	grade > 6	grade > 6	grade > 6
no visible change	no visible change	no visible change	no visible change
OK	ОК	OK	ОК
0,109 m²K/W	0,073 m²K/W	0,073 m²K/W	0,073 m²K/W
0,11 W/mK	0,14 W/mK	0,14 W/mK	0,14 W/mK
60 dB	56 dB	56 dB	56 dB
15 dB	19 dB	19 dB	19 dB
97 dB (A)	94 dB (A)	94 dB (A)	94 dB (A)
96,1 sone	80,3 sone	80,3 sone	80,3 sone
< 2 kV (antistatic)			
Class 1	Class 1	Class 1	Class 1
FSC® certified*** (optional)	FSC® certified**** (optional)	FSC® certified**** (optional)	FSC® certified*** (optional)
MSR-B3	MSR-B3	MSR-B3	MSR-B3
A .	•	•	·
A+	A+	A+	A+
Pass	Pass	Pass	Pass
Compliant	Compliant	Compliant	Compliant
Compliant	Compliant	Compliant	Compliant
Pass	Pass	Pass	Pass
E1	E1	E1	E1
Pass	Pass	Pass	Pass
CARB II / TSCA Title VI Compliant	CARB II / TSCA Title VI Compliant	CARB II / TSCA Title VI Compliant	CARB II / TSCA Title VI Complia
PCP free	PCP free	PCP free	PCP free
Class 3**	Class 3**	Class 3**	Class 3**
Class Cfl-s1	Class Cfl-s1	Class Cfl-s1	Class Cfl-s1
01033 011 31	01000 011-01	0.033 011-31	
62 25 LISP// (average)	62 25 USD// (average)	62 25 LICDV/ (august = -)	40.0E LICDV/
62,25 USRV (average) 47,75 USRV (average)			

			Pro
		TEST METHOD	
	Wood veneer floor covering	EN 14354	
	Domestic usage classification	EN 14354	Class 23
	Commercial usage classification	EN 14354	Class 31
	Warranty	DECOSPAN nv	Residential use: 15 years Low commercial use: 5 years
	CE certification	EN 14342	EN 14342
	Dop n°		19005
GENERAL	Moisture content	EN 322	6 % (+/-1)
	Dimensions of floor boards	EN 14354	1203 × 190 × 7,2mm
	Thickness of the wear layer	EN 14354	0,6 mm
	Deviation of thickness	EN 14354	≤0,5 mm
	Deviation of squareness	EN 324-2	≤0,2 mm
	Cup in width direction	EN 14354	≤0,2 %
	Flatness deviation	EN 14354	4%
	Internal bond	EN 319	> 1,4 N/mm²
	Veneer glueing adhesion	DIN EN 205	≥ 1 N/mm²
	Mechanical connection system		Uniclic®
	Opening between elements	EN 14354	≤ 0,2 mm
	Tensile strength on short end	ISO 24334	> 2000 N/lm
	Density	EN 323	900
	Weight/m ²		7 kg
CLASSIFICATION	Thickness distention	EN 14354	< 13%
PROPERTIES	Resistance to indentation	EN 1534	≥ 30 N/mm²
	Resistance to abrasion	EN 14354	> 2000 rev.
	Impact resistance	EN 438-2.21	≥ 1200 (EC2)
	Adhesion of the lacquer	EN ISO 2409	class < 2
	Resistance to chemical agents	EN 13442	grade 4*
		1	
ADDITIONAL PROPERTIES	Gloss	EN ISO 2813	super matt 3% (+/- 1)
	Hardness of the lacquer	DIN 53154	≥ 3 Newton
	Residual indentation	EN 433	< 0,05 mm
	Impact resistance acc. to Wegner	EN 438-2 / 11	≥ 5 Newton
	Elasticity of the lacquer	CEN / TC 112 (Brinell)	2 Hb
	Colour fastness	EN ISO 105-B02	grade > 6
	Castor chair resistance	EN 425	no visible change
	Underfloor heating		OK
	Thermal resistance	EN 12667	0,053 m²K/W
	Thermal conduction	EN 12667	0,14 W/mK
	Normalized impact sound pressure level	ISO 10140-3 / ISO 717-2 (Ln,w)	55 dB
	Reduction of impact sound pressure level	ISO 10140-3 / ISO 717-2 (ΔLw)	20 dB
	A-weighted walking noise	EN 16205 (Ln,walk,A)	91 dB (A)
	Loudness of reflected walking noise	EN 16205 Loundness RWS	68,7 sone
	Antistatic performance	EN 1815	< 2 kV (antistatic)
	Biological durability	EN 335	Class 1
	Well-managed forests		FSC® certified**** (optional)
	Martindale test (scratch resistance)	EN 16094	MSR-B3
SAFETY	VOC loss	French VOC regulation ISO 16000	A+
PROPERTIES	VOS M1		Pass
	VOS LEED V4		Compliant
	VOS BREEAM		Compliant
	VOS Indoor air comfort GOLD		Pass
	Formaldehyde emission	EN 717-1	E1
	Formaldehyde emission	CDPH	Pass
	Formaldehyde emission baseboard	ASTM E 1333	CARB II / TSCA Title VI Compliant
		CEN / TR 14823	PCP free
	PCP (pentachlorophenol)		
	Burning cigarette	EN 438-2 / 30	Class 3**

Slip resistance (dry)

Slip resistance (wet)

CEN / TS 15676

CEN / TS 15676

62,25 USRV (average)

47,75 USRV (average)

* 1=surface destruction, 5=no visibel changes / ** class 3 = moderate change of gloss level and/or moderate brown spot / *** FSC C095327



Choosing a floor isn't just something you use your eyes for. You have to be able to feel it and experience for yourself what the effect of each type of wood and finish is. Count on our experts, who will be happy to put their savoir-faire at your disposal to help you.



Need more inspiration? Follow us on Instagram @parkyfloors #myPARKYfloor



Quickly find a store near you? Scan the code or go to www.par-ky.com/en/dealers

It's good to live on wood



Decospan nv Industriezone Grensland Lageweg 33 8930 Menen - België tel +32 56 52 88 49 info@par-ky.com

© Decospan 2023 - Nothing from this brochure may be reproduced without written prior permission. Please note that the information in this brochure may be outdated and a new version may already have been issued. That is why we recommend you to always consult our website to download the most recent version. The photos of the different wood species, as shown in this brochure, are a representation of a unique part of wood and are not binding for future deliveries. Decospan is committed to the continuous improvement of its products and services, therefor the actual products may differ from the products and pictures in this brochure. Decospan disclaims any liability pursuant to the variations that may occur between the products and pictures in this brochure and the actual products. All content in this brochure is for information purposes only and no rights can be obtained therefrom.

