


Product data

Design flooring MeisterDesign. comfort DB 600 S





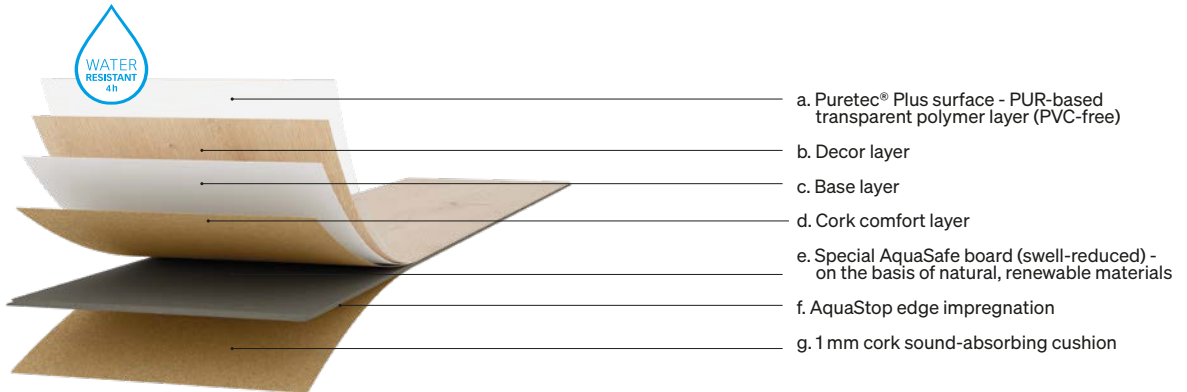











| Tests | DIN/EN standard | Design flooring MeisterDesign. comfort DB 600 S |
|-------|-----------------|--|
|-------|-----------------|--|

General data on product composition

| | | |
|--|--|--|
| Type of covering: | Semi-rigid multi-layer flooring panel with an abrasion-resistant decorative top layer | |
| Total thickness: | approx. 9 mm | |
| Effective measurement: (length × width) | 853 × 395 mm | |
| Product structure: | a. Puretec® Plus surface - PUR-based transparent polymer layer (PVC-free) b. Decor layer c. Base layer d. Cork comfort layer e. Wood fibre board (approx. 890 kg/m ³ ± 3%) f. AquaStop edge impregnation g. 1 mm cork sound-absorbing cushion | |

Technical data

| | | |
|---|----------------------------|---|
| Locking method: | Masterclik Plus | |
| Wear class: | ISO 10 874 | 23 / 33 |
|  | | |
|  Wear resistance: | EN 13 329 (procedure A) | IP ≥ 2 000 cycles |
|  Antibacterial surface property: | ISO 22196 | Effectiveness of the antibacterial property against Staphylococcus aureus ATCC 6538P and Escherichia coli ATCC 8739: "strong", value of the antibacterial effect A ≥ 3. |
|  Impact resistance: | EN 13 329 (appendix F) | ≥ 1 600 mm |
|  Stain resistance: | EN 438-2/25 | Group 1: grade 5 Group 2: grade 5 Group 3: grade 4 Coloured rubber, natural rubber or plastic glides and castors as well as dark car, bike or equipment tyres may possibly cause discolouration on flooring. Please only use light, non-migrating furniture glides, castors or tyres, if possible. |
|  Colour fastness: | EN ISO 105-B02 | ≥ stage 6 on the blue wool scale / ≥ stage 4 on the grey scale |
|  Fire behaviour: | EN 13 501 | Bfl-s1 (hardly flammable) |
|  Slip resistance: | EN 14 041 / 13 893 | DS |

| Technical data | | | |
|---|---|---------------------------|--|
|  | Formaldehyde emissions (E1 = 0.1 ppm): | EN 717-1 | ≤ 0.05 ppm |
|  | Content of pentachlorophenol: | EN 14 041 / 14 823 | < 5 ppm |
|  | Indent after constant load: | EN ISO 24343-1 | ≤ 0.1 mm |
|  | Castor resistance: | ISO 4918 | no visible changes or damage with soft, standard castors (type W) |
|  | Behaviour on simulation of shifting furniture foot: | EN ISO 16581 | Foot type 0: no visible damage |
|  | Underfloor heating: | | Suitable for hot-water underfloor heating. Electrical underfloor heating is generally suitable when it is built into the floor screed or the concrete layer and thus does not lie on the concrete layer as foil heating. The heating elements pipes wires must lie across the entire area and not just be partly present. If the area is only partially heated, the floor covering must have expansion joints (system profile strips). The maximum permitted surface temperature is 29°C. Standard foil heating systems are generally not recommended. One exception is self-regulating heating systems which maintain the 29°C surface temperature. |
| | Underfloor cooling: | | A separate leaflet is available for laying on cooled floor constructions. |
| | Heat transfer resistance: | EN 12 667 | 0.088 (m²K)/W |
| | Thermal conductivity: | EN 12 667 | 0.109 W/(m*K) |
|  | Footfall noise reduction: | DIN EN ISO 10140-3 | 17 dB |
| | Antislip: | DIN EN 16165 (appendix B) | R 10 |

| Tolerances | | | |
|------------|-------------------------------------|-----------|-------------------|
| | Right-angle of the elements: | EN 16 511 | target values met |
| | Determination of edge straightness: | EN 16 511 | target values met |
| | Surface flushness: | EN 16 511 | target values met |
| | Joint opening between the elements: | EN 16 511 | target values met |

| General data on environment, installation and care | | | |
|--|---------------------------------|------------|---|
| | Blue Angel: | RAL-UZ 176 | awarded |
| | Disposal: | | Residual pieces can be disposed of in household refuse (e.g. thermal treatment). Dispose large quantities according to municipal provisions (e.g. recycling centres). An energetic utilisation in authorised plants is recommended. |
| | Cleaning and care: | | Cleaning after construction work: Dr. Schutz PU Cleaner Regular cleaning: Dr. Schutz PU Cleaner Freshening care: Dr. Schutz Floor Mat |
| | Areas of application: | | The flooring is suitable for all living areas as well as for commercial areas with heavy wear, e.g. open-plan offices, department stores, public buildings etc. The design floor is water-resistant (4 hours protection against standing water). Can be installed in humid rooms like e.g. bathrooms. This does not include outdoor areas and wet rooms, e.g. saunas, shower cubicles, steam rooms and rooms with a floor drain. Special requirements apply to treatment rooms and medical practices. |
| | Preconditions for installation: | DIN 18 365 | The substrates must be ready for laying on according to the generally recognised rules of the trade, taking into account VOB (German construction contract procedures), part C DIN 18 365 "Floor covering work". The substrate must be dry (in the case of mineral substrates max. 2% or with underfloor heating 1.8 %, with anhydrite screed max. 0.5% or with underfloor heating 0.3 % residual moisture – measured with CM devices), even, firm and clean. Additionally, any unevenness of 3 mm/ per initial metre and 2 mm per further metre must be evened out according to DIN 18 202, table 3, line 4. The installation instructions provided with the product must be observed. |



MeisterWerke Schulte GmbH reserves the right to make alterations to material and structures when this serves to improve the quality.